



14" - 26"

12" - 24"

400 V



YouTube
Directly to the product video!



YouTube
Directly to the product video!



optional:



Automatic mounting head TW X-AMK

Tyre changer - Automatic

Item No.: TW X-31 | X-36

Description

Tyre changer with pneumatically operated tilting column and integrated air-booster. Ideal for all standard, low profile and run flat tyres. TW X-36 with help-arm, TW X-31 without the help arm can be added as an option at anytime.



Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- The mounting arm tilts backwards
- Solid construction | Gentle on the rims
- Pneumatically adjustable mounting head
- Powerful bead breaker (2500 kg)
- Self centering 4 jaw clamping system
- Large clamping range for cars and vans (Outside 12" - Inside 26")
- Air booster integrated in the clamping jaws
- Exchangeable plastic protectors for the mounting head
- High quality stainless steel components in the inner part
- Precise control block with STOP function
- Powerful electrical motor
- Clamping jaws made of special steel

Delivery contents


Tyre changer with maintenance unit | Air filler and lifting lever | Plastic protectors for the mounting jaws (4 pcs.) | Plastic protectors for the mounting head (set 3 pcs.) | Operating instructions and CE-Certificate

Details

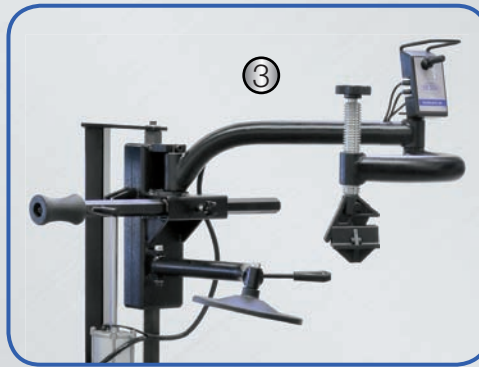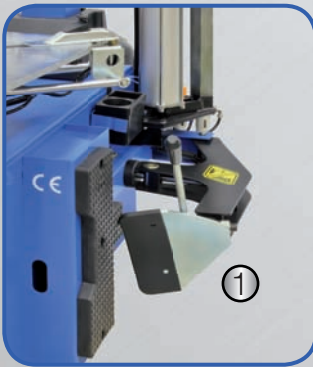

(1) Powerful bead breaker (2) Fine adjustment by joystick (on the mounting arm) (3) Help-arm with bead roller, bead presser and bead loosening disk (4) Large air tank for the integrated air boosters in the mounting jaws

Dimensions | Technical data

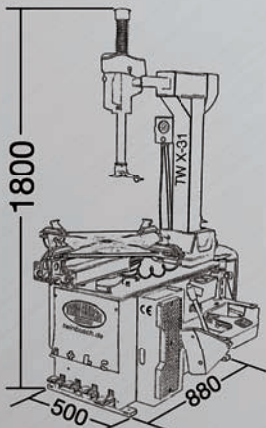

Extensive accessories

Technical Data: TW X-31 / X-36	
Clamping range outside	12" - 24"
Clamping range inside	14" - 26"
Wheel diameter (max.)	45" (1143 mm)
Wheel width (max.)	16" (406 mm)
Bead breaker force	2500 kg
Air supply	8-10 bar
Power supply	400 V / 3 Phase
Motor power	1,1 kW
Noise level	<70 dB
Weight (approx.)	246 / 320 kg