



# Tyre changer - Semi-automatic

## Swing-arm design | Item No.: TW X-98

### Description

Our multi-talent for all standard, low profile and run flat tyres. Two help-arms for more efficiency.

### Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Mounting head can be moved to the side
- Solid construction
- Pneumatic mounting head adjustment
- Powerful bead breaker (2500 kg)
- Self centering 4-jaw clamping system
- Large clamping range for cars and vans (Outside 12"- Inside 28")
- Integrated air booster in the clamping jaws
- Exchangeable plastic protectors for the mounting head
- High quality stainless steel components in the inner part
- Precise control block with STOP function
- Powerful electrical motor
- Clamping jaws made of special steel



⊕ 14"-28"

⊙ 12"-26"

⚡ 230 V

or\*

⚡ 400 V

Both versions available




**YouTube**  
Directly to the product video!

### Delivery contents


Tyre changer with maintenance unit | Air filler and lifting lever | Plastic protectors for the clamping jaws (4 pcs.) | Plastic protectors for the mounting head (set 3 pcs.) | Operating instructions and CE-Certificate

### Details

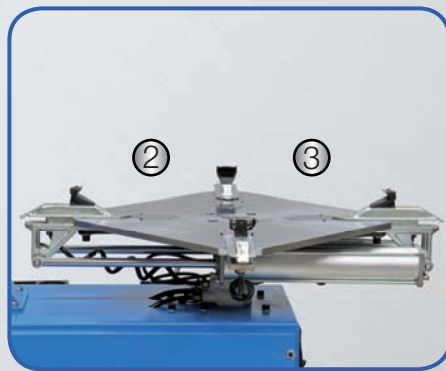

(1) Two help-arms for more efficiency (2) Powerful air jets in all clamping jaws  
(3) Large clamping range (4) Powerful bead breaker

### Dimensions | Technical data | Accessories

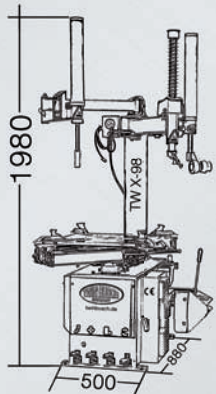

Extensive accessories

Technical Data: TW X-98	
Clamping range outside	12" - 26"
Clamping range inside	14" - 28"
Wheel diameter (max.)	45" (1143 mm)
Wheel width (max.)	16" (406 mm)
Bead breaker force	2500 kg
Air supply	8-10 bar
Power supply	400 V or 230 V*
Motor power	0,75 / 1,1 kW
Noise level	<70 dB
Weight (approx.)	276 kg

\*Please note: The products are being sold as the 400-volt model, if desired, please specify the 230-volt version.