



Chicago Pneumatic



CP7736

Performance and Durability ½" Impact Wrench



- ✓ Powerful
- ✓ Ergonomic
- ✓ Compact



**Vehicle
Service** Tools

People. Passion. Performance.

Powerful & Ergonomic

- 670 ft.lbs - 900 Nm of maximum torque in reverse
- Curved comfortable handle

CP7736

Performance and Durability ½" Impact Wrench

HIGH DURABILITY

- Twin hammer mechanism
- Steel motor

GREAT CONTROL


3 power settings in forward and one in reverse

RUGGED & ROBUST

Aluminum housing

COMFORT

Ergonomic handle design for greater operator comfort

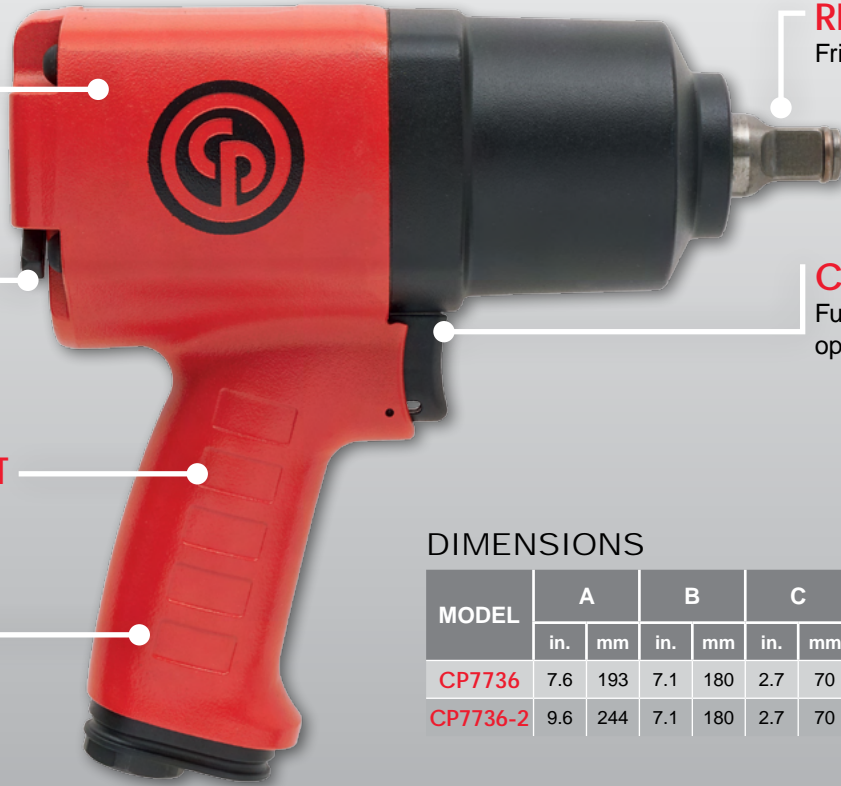

RETENTION

Friction ring

CONTROL

Full teasing trigger for easier operation

DIMENSIONS

MODEL	A		B		C	
	in.	mm	in.	mm	in.	mm
CP7736	7.6	193	7.1	180	2.7	70
CP7736-2	9.6	244	7.1	180	2.7	70



Model	Part number	Anvil	Square Drive	Speed	Working Torque		Max Torque		Weight		Air Consumption average		Air Consumption @ load		Sound Level	Vibration
		inch	inch	RPM	ft-lbs.	Nm	ft-lbs.	Nm	lbs	kg	cfm	l/s	cfm	l/s	dBA	m/s ² (k)
CP7736	894 107 7360	Short	½"	10020	51 – 568	69 – 770	670	900	5.1	2.32	4.4	2.1	18	8.3	93.8	9.5 – (2.2)
CP7736-2	894 107 7362	2"	½"	10020	51 – 568	69 – 770	670	900	5.9	2.62	4.4	2.1	18	8.3	93.8	9.5 – (2.2)

All models: Hose int. 3/8" (10 mm) - @90 PSI (@6.3 Bar)

Listed specifications are for reference only. Please check tool documentation.



SOCKETS

Scan the QR code to access our socket catalog

All socket sizes and types available on www.cp.com

NEW 2 STAGE COMPOSITE FRL

Part # NPT	Part # BSP	Size	Max. Flow Rate	
		in.	cfm	l/sec
894 017 1944	894 017 1927	¼"	74	34
894 017 1946	894 017 1929	½"	96	44

TUNE-UP KIT

Model	Tune-up Kit
CP7736 & CP7736-2	894 017 1161

Chicago Pneumatic also offers a large range of air tools, accessories, and workshop equipment to optimize your air tools durability and performance: Check www.cp.com website for more information.



www.cp.com